

# 6250 Covered Hopper



## PLASTIC PELLET SERVICE


This 6,250 cubic foot capacity covered hopper is specially lined and equipped with four pneumatic gates, which make it ideally suited for the storage and transportation of plastics, resin, and other free-flowing, light-density products.

From top hatches to bottom unloading gates, Greenbrier's 6250 cube cars are built to protect against even the smallest product contamination. Its curve sided, all welded design incorporates four aluminum pneumatic gates and a ten hatch arrangement (4 vented and 6 unvented).



Dimensiones (aproximadas)			
Length, over couplers	67' - 10"	Width, extreme	10' - 4 3/4"
Length, between truck centers	54' - 2"	Discharge gate size	4X Puertas Pre-Neumaticas
Height, extreme	15' 6"	Hatch openings	10 Aperturas de 20" DIA.
Length, inside	62' - 9 5/8"	Clearance	AAR Plate C
Peso/Capacidad (estimada)		Negociabilidad de Radio de Curva	
Light weight	66,500 lbs..	Uncoupled	180'
Gross rail load	286,000 lbs.	Coupled to like car	256'
Load limit	219,500 lbs.	Coupled to base car	253'
Cubic Capacity	6,250 cu. ft..		

These general dimensions are representative and subject to change without notice as required by customer specifications or design improvements by Gunderson-GIMSA.  
DESIGNED AND BUILT TO AAR SPECIFICATION FOR M-1002; DOT SPECIFICATION : DOT 111A100W1

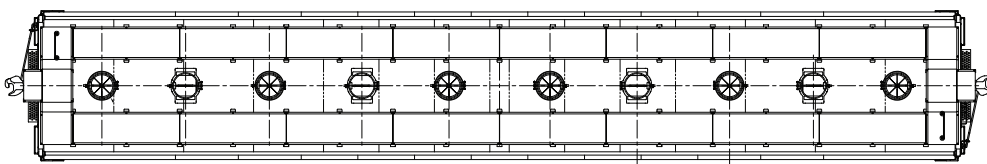

20" vented hatch covers allow necessary ventilation, protecting against vacuum pull and product contamination. 4 aluminum pneumatic discharge outlets provide optimal product flow with clean-out.

